



BTE-70838-X1

SMP Passive Docking Station Chassis

Features

- Sealed electrical interface
- Light Weight
- EMI Robust - fully shielded interface and cable
- Electrical interface for power output, charge input and SMBus communication
- CE Compliant

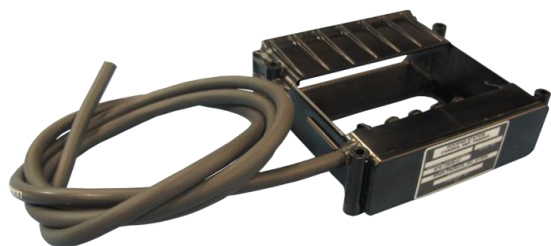

Related Products

- BT-70838Bx SMP Battery Family
- BT-70838-2/3Bx SMP Battery Family
- BT-70838-1/3Bx SMP Battery Family

Technical Specifications

National Stock Number		Pending
BT Part Number		BTE-70838-X1
Dimensions	Chassis	Length: 1.2 in (31 mm) Width: 3.5 in (90 mm) Height: 3.4 in (87 mm)
	Cable	Length: 39.4 in (1000 mm)
Weight		With Cable: 0.25 lbs (0.11 kg) Without Cable: 0.11 lbs (0.05 kg)
Operating Temperature		-20°C to +50°C (-4°F to +122°F)
Storage Temperature		-40°C to +70°C (-40°F to +158°F)
Material/Color		Black Polycarbonate
Disposal		Check local regulations (Contains 0% Mercury or Cadmium)

Bren-Tronics is an advanced designer and manufacturer of primary and rechargeable batteries, chargers and complete energy storage systems from watt hours to megawatt hours.

For a complete description of our products refer to Bren-Tronics website at: <http://www.bren-tronics.com>



HEADQUARTERS

United States

10 Brayton Court, Commack, NY 11725

Phone: 1-631-499-5155 • Fax: 1-631-499-5504

Europe • 20 rue Henri Regnault 75014, Paris, France • Phone: +33(0)1-40-59-8051 • Fax: +33(0)1-45-41-5816

United Kingdom • 7 Airfield House, Kingston Business Park, Kingston Bagpuize, Oxon OX13 5FD • Phone: +44-1865-822322 • Fax: +44-1865-822301

Data presented in this document is subject to change without notice. This is for marketing and sales purposes only. This is not a controlled document. Please contact Bren-Tronics for latest specifications.